


# Seal paste PLASTEX

*New Formula*

## Description

Seal paste for sealing of flat and threaded joints.

Easy to remove if needed.




## Technical characteristics

Aspect : paste  
Colour : orange red

Density :  $1.65 \pm 5 \%$   
Viscosity : 100 to 300 Poises

## Instructions for use

- 1) Clean the parts to be assembled
- 2) Homogenize the seal paste by agitation before use
- 3) Spread all over a thin layer of Plastex
- 4) Join and press together the spread parts. Let dry a few minutes before putting together if joints are subjects to intensive efforts.

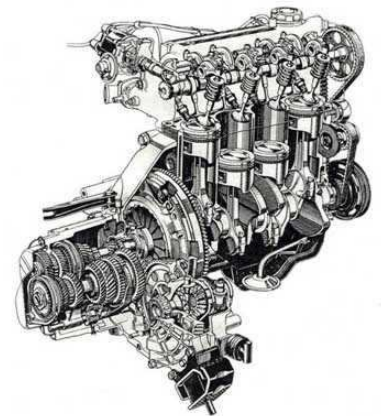

## Fields of use

After commercial tests, our customers approved the use of the seal paste PLASTEX New Formula for the sealing of assemblages in the following applications :

- ⇒ *Automotive / mechanical maintenance*
- ⇒ *Shipbuilding, oil-bearing and food industries...*
- ⇒ *Installation / plumbing*



Contact : <http://www.flertex.fr/contacts.htm>